

Safety Device according to EN 730-1, ISO 5175

Model: **SRT**



For protection of Cylinder-Regulators and Tapping Points.



The model SR is especially constructed for single Cylinder installations with small flow rates. To point out is the excellent price performance ratio.

Safety elements:

Gas non-return valve	NV
Flame arrestor	FA
Thermal cut-off valve	TV

Dust filter promotes long shelf-life

Threads:

In accordance with EN 560, ISO 3253 or country specific connections

Fuel Gas: G3/8"LH, M16X1.5LH, UNF9/16"-18LH, UNF5/8"-18LH, 1/4"-NPT

Oxygen/Compressed Air: G1/4"RH, G3/8"RH, M16X1.5RH, UNF9/16"-18RH, UNF5/8"-18RH, 1/4"-NPT

For additional connections please contact IBEDA

Gas-Types:

Acetylene (A), Town Gas (C), Ethylene (E), Hydrogen (H), Natural Gas (Methane) (M), Propane (P), Oxygen (O), Compressed Air (D)

Working pressure:

A 1.5 bar ; H 3.5 bar ; CEMP 5.0 bar ; DO 15.0 (20,0) bar

Measure and weight:

diameter: 21,00 mm
 length: 58,50 mm
 weight: 103,60 g

Maintenance:

The safety devices have to be tested by a qualified and authorised person at regular intervals according to country specific regulations. They have to be tested for gas tightness and gas return at least once a year.

Design:

Other materials and surface finishing on request.



Safety Device according to EN 730-1, ISO 5175




Model: **SRT**

Flow rates:

p_v = Primary pressure

p_h = Secondary pressure

Δp = Primary pressure minus Secondary pressure

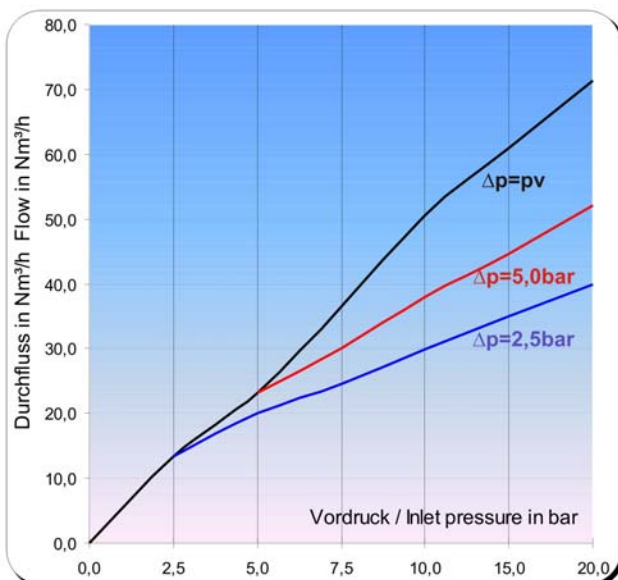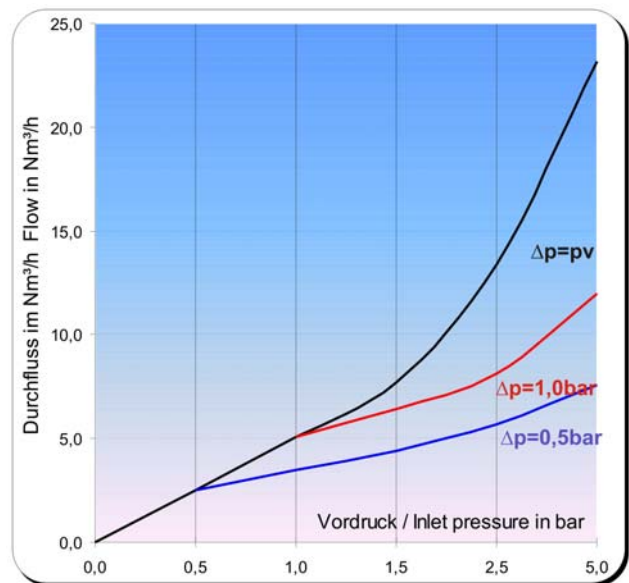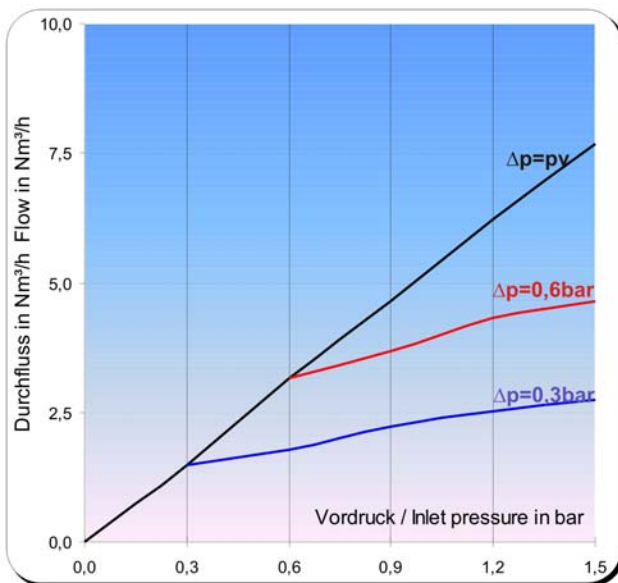

Conversion Factors

Gas type	Code	Pressure units:
Acetylen	A	1MPa = 10bar
Oxygen	O	1bar = 14,503psi
Hydrogen	H	1MPa = 145,03psi
Air	D	1bar = 100kPa
Natural Gas, Methane	M	1m³ = 35,32 ft³/h
Propane	P	
Ethene	E	

Flow rate

Air	Air	1,00
Air	Acetylen	1,20
Air	Butane	0,86
Air	Natural Gas	1,25
Air	Methane	1,40
Air	Propane	0,90
Air	Oxygen	0,95
Air	Hydrogen	2,50
Air	Ethene	1,02



CERTIFIED SAFETY.
Worldwide!