



Cylinder pressure regulator HD 200

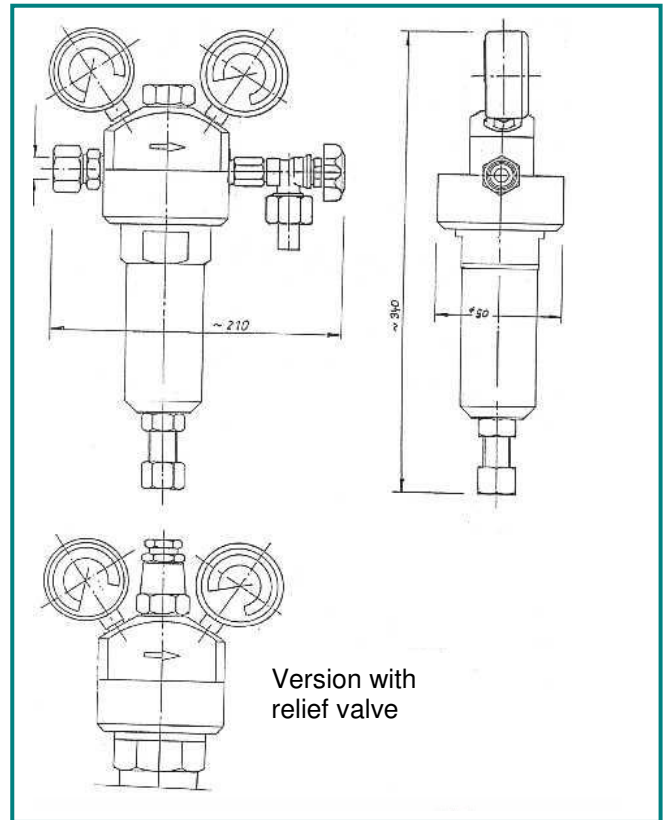

Model	Gas	Inlet pressure P1	Outlet pressure P2	Flow Q1	Inlet connection	Outlet connection
HD 200	F, NF, NC, C	max. 300 bar	max. 200 bar	See diagram	Cylinder DIN 477/CEN	W 21, 8x ¹ / ₁₄ DIN 477

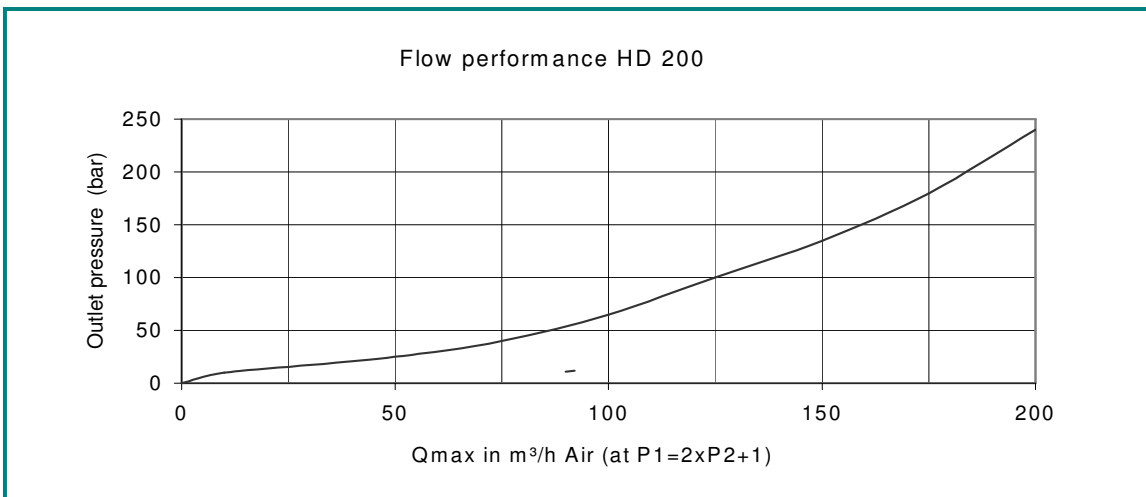

The cylinder pressure regulator ZD 200 reduces a maximum inlet pressure from 300 bar down to 200 bar and kept constant. The ZD 200 is supplied in brass for non-corrosive, flammable (except acetylene) and non-flammable gases as well as stainless steel for corrosive gases.

The HD 200 is a single stage pressure regulator to DIN EN 961 (ISO 7291). The regulator can also be delivered with relief valve and mounting bracket.