



## Line pressure regulator VDS - PHR

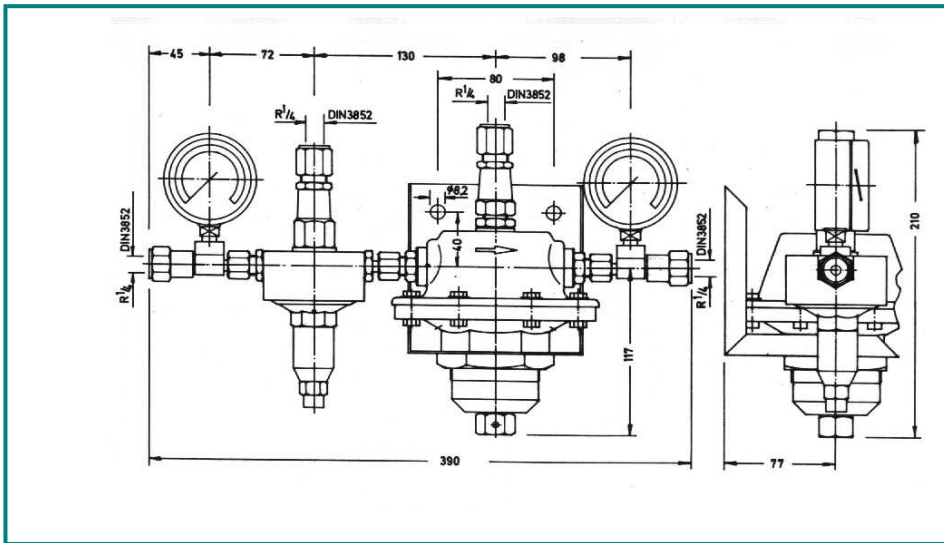

Model	Gas	Inlet pressure P1	Outlet pressure P2	Flow Q1	Inlet connection	Outlet connection
VDS - PHR	F, NF, NC,C,T	max. 300 bar	max. 0,4/0,8/2 bar	10 m <sup>3</sup> /h Air	G <sup>1</sup> / <sub>4</sub> DIN 3852	G <sup>1</sup> / <sub>4</sub> DIN 3852

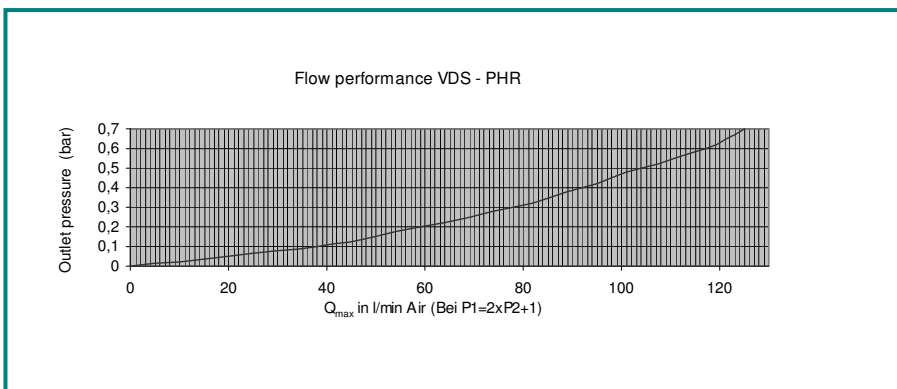

The pressure regulator VDS-PHR is used in the area of laboratory, research and process. The VDS-PHR is a two stage regulator with cantilever system and a large diaphragm in the second stage which gives an exact regulation of the gas flow.