






# SUCHY BEZPIECZNIK PRZYPALNIKOWY GT



| Rodzaj gazu | Przyłącze wlotowe | Przyłącze wylotowe  | Numer art. |
|-------------|-------------------|---------------------|------------|
| Gaz palny   | 4,0 mm            | G <sup>3/8</sup> LH | 0701-2002  |
|             | 5,0 mm            | G <sup>3/8</sup> LH | 0701-2092  |
|             | 6,3 mm            | G <sup>3/8</sup> LH | 0701-2016  |
|             | 8,0 mm            | G <sup>3/8</sup> LH | 0701-2032  |
| Tlen        | 4,0 mm            | G <sup>3/8</sup> RH | 0701-2008  |
|             | 5,0 mm            | G <sup>3/8</sup> RH | 0701-2098  |
|             | 6,3 mm            | G <sup>3/8</sup> RH | 0701-2022  |
|             | 8,0 mm            | G <sup>3/8</sup> RH | 0701-2038  |
|             | 4,0 mm            | G <sup>1/4</sup> RH | 0701-2007  |
|             | 5,0 mm            | G <sup>1/4</sup> RH | 0701-2097  |
|             | 6,3 mm            | G <sup>1/4</sup> RH | 0701-2021  |
|             | 8,0 mm            | G <sup>1/4</sup> RH | 0701-2037  |

Inne rodzaje przyłączy na zapytanie

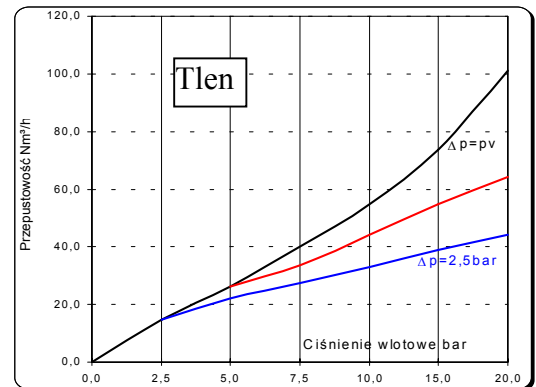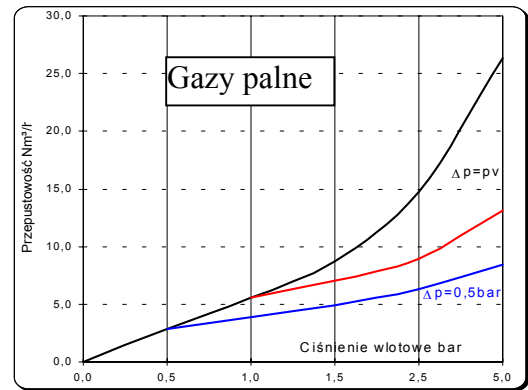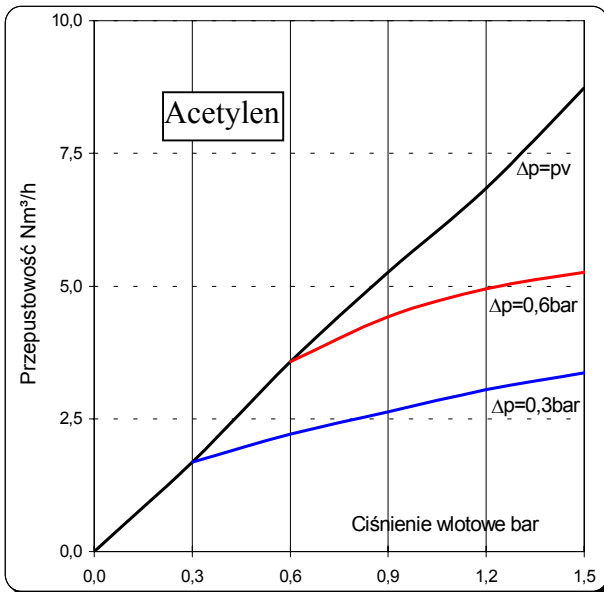

**PEGO POLSKA Sp. z o.o.**

Dział Handlowy

Al. Armii Krajowej 54

50 – 354 Wrocław

tel./fax 071 7837826

tel. 071 7837662 lub 63

[www.pego.pl](http://www.pego.pl)

e-mail: [pego@pegopolska.pl](mailto:pego@pegopolska.pl)

Współczynnik przeliczeniowy

|          |                                |        |
|----------|--------------------------------|--------|
| Acetylen | C <sub>2</sub> H <sub>2</sub>  | x 1,04 |
| Wodór    | H <sub>2</sub>                 | x 3,75 |
| Propan   | C <sub>3</sub> H <sub>8</sub>  | x 0,80 |
| Butan    | C <sub>4</sub> H <sub>10</sub> | x 0,86 |
| Metan    | CH <sub>4</sub>                | x 1,33 |
| Tlen     | O <sub>2</sub>                 | x 0,95 |
| MAPP     | C <sub>3</sub> H <sub>4</sub>  | x 0,81 |